









■ Features

- •Charger for lithium batteries (Li-ion,LiFePO4and lithium manganese) and Lead-Acid batteries
- •Built- in 4 stage charging curve(For Lithium batteries) and 3 stage charging curve(For Lead-Acid batteries)
- •Universal AC input / Full range(90-264V~)
- •Built- in active PFC function
- •Protection: Short circuit / Over voltage /Over temperature /Battery over voltage / Battery reverse polarity protection
- 1 years warranty


Applications

- •Radio system backup solution
- •Electric scooter charger
- Surveillance system
- •Electric motorcycle\Electric sweeper

Description

G300 is a single output $300\mathrm{W}$ AC/DC desktop type charger with 4 and 3 stage charging curve, suitable for lithium battery (lithium ion, lithium iron phosphate, lithium manganese) and lead-acid battery (colloid battery, liquid battery, AGM battery). When charging, the LED can indicate the battery capacity when charging.

■ Mode Encoding

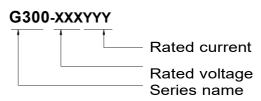




	MODEL	G300-148180	G300-296100	G300-444067	G300-588050
	Charge voltage (High voltage)	14.8V±1%	29.6V±1%	44.4V±1%	58.8V±1%
ОИТРИТ	Charge voltage range	10.0-14.8V	20.0-29.6V	30.0-44.4V	40.0-58.8V
	Float charge (Low voltage)	13.8V±1%	27.6V±1%	41.4V±1%	55.2V±1%
		18.0A±7%			5A±7%
	Charge current		10.0A±7%	6.7A±7%	
	Charge-end current	≤3.6A ±20%	≤2A ±20%	≤1.34A ±20%	≤1A ±20%
	Rated power	266.4W	296W	297.48W	294W
	Recommended battery capacity Note.3		50 - 150Ah	35 - 100Ah	25 - 80Ah
	Leakage current from battery (Typ.)				
CHARGING LED	Red LED flashing	2Hz Error			
	Green LED flashing	Idle			
	Red LED on	Charging			
	Green LED on	Full			
INPUT	Rated input voltage	100 - 240VAC 50 / 60Hz			
	Input voltage range Note.4	90 - 264VAC			
	Power factor (Typ.)	PF>0. 98@Full load,Input:115VAC ; PF>0. 94 @Full load,Input:230VAC			
	Input current (Typ.)	4.5A@100VAC			
	Inrush current (Typ.)	Cold start75A @230VAC			
	Standby input power	<1W	T		
	Efficiency (Typ.)	94%	95%	95%	95%
PROTECTION	Short circuit Note.5	Protection type : Shut down output			
	Over voltage	Protection type : Shut down output			
	Reverse polarity	Protection type : Shut down output			
	Over temperature	-			
ENVIRONMENT	Working temperature	-10 - +40°C (Refer to " Derating Curve")			
	Working humidity	0 - 90% RH			
	Storage temperature, humidity	-40 - +70°C, 0- 95% RH			
	Cooling	Natural convection			
	Vibration resistance	10-50Hz,2G10min.1cycle,60min.eachalongX,Y,Zaxes			
SAFETY& EMC(Note.6)	Max. temperature rise	< 40°C on casing			
	Hi-Pot Insulation	i/p to o/p: 3000V (1 min)			
	Safety approval	CB/CE/FCC/CCC/cTUVus			
	EMC Emission	Parameter	Standard		Test Level I Note
		Conducted	EN55032 FCC PART15		Class B
		Radiated			
		Harmonic Current EN61000-3-2			
	EMC IMMUNITY	Voltage Flicker EN61000-3-3 EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4 11			
	MTBF	30000H			
OTHERS	Dimension	220*105*43mm (L*W*H)			
	Weight	1300g			
NOTE	 Modification for charger specification may be required for different battery specification. Please contact battery vendor and Green digital power for details. 				
	2.All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 3.This is Green suggested range. Please consult your battery manufacturer for their suggestions about maximum charging current limitation.				
	4. Derating may be needed under low input voltages. Please check the derating curve for more details.				
	5. This protection mechanism is specified for the case the short circuit occurs after the charger is turned on.				
	6. The battery charger is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives.				

■ Block Diagram POLARITY REVERSE PROTECTION DC+ POWER SWITCHING RECTIFIERS **EMIFILTER** PFC & FILTER & RECTIFIERS CIRCUIT AC DC-PFC PWM CONTROL DETECTION CIRCUIT CONTROL **■** Derating Curve 100 80 LOAD (%) 60 40 20 50 -10 10 20 30 40 60 AMBIENTTEMPERATURE($^{\circ}$) **■** Static Characteristics 100 90 80 70 60 220 90 100 120 150 240 264 AC input voltage (V)

■ Charging Curve

4stage charging curve(Li-ion battery charger)

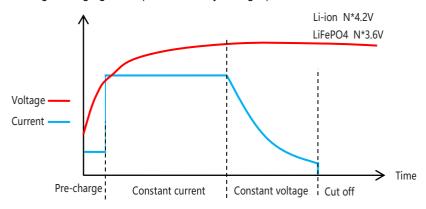

© 3stage charging curve(Lead-Acid battery charger)

