

■ Features

- Charger for Lithium-Ion batteries (Li-ion, LiFePO4) and Lead-Acid (AGM, GEL, VRLA) batteries
- Built-in 4 stage charging curve (For Lithium batteries) and 3 stage charging curve (For Lead-Acid batteries)
- Universal AC input, world-wide range AC90-264V 50/60Hz
- With active PFC function, CE & FCC certifications
- Optional CAN communication
- Protection: Short circuit / Over voltage / Over temperature / Reverse polarity protection
- Waterproof and dustproof, IP67 class level

■ Applications


- Golf carts/ Buggy/Utility EV
- Electric forklift
- AGV/ Drone/ Robot
- Electric motorcycle/ tricycle
- Energy storage system
- Marina / Ship / Boat

■ Description

The WP1800 series is an aluminum alloy housing waterproof IP67 charger with a rated output power 1800W at 220-240VAC input and 1200W at 100-120VAC input, with programmable 3 and 4 stages charging curves for 48V 60V 72V 84V Lead-acid batteries (Gel, AGM, VRLA) and Lithium batteries (Li-ion, LiFePO4). They are widely used for golf club cart, utility EV, AGV and so on.

The part-number named rule as following:


WP1800-XXXXYY

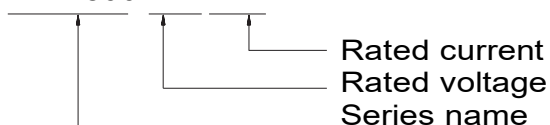


SPECIFICATION(Li-ion battery charger)

MODEL		WP1800-294500	WP1800-420400	WP1800-546300	WP1800-672250	WP1800-840200
OUTPUT	Charge voltage	29.4V±1%	42.0V±1%	54.6V±1%	67.2V±1%	84.0V±1%
	Charge voltage range	17.5-29.4V	25.0-42.0V	32.5-54.6V	40-67.2V	50.0-84.0V
	Charge current	200-240VAC	50.0A±10%	40.0A±10%	30.0A±10%	25.0A±10%
		100-120VAC	36.0A±10%	28.0A±10%	20.0A±10%	17.5A±10%
	Pre-charge current	7.2A±10%	5.6A±10%	4.0A±10%	3.5A±10%	2.8A±10%
	Charge-end current	≤3.6A ±10%	≤2.8A ±10%	≤2.0A ±10%	≤1.8A ±10%	≤1.4A ±20%
	Rated power	200-240VAC	1470W	1680W	1638W	1680W
		100-120VAC	1058.4W	1176W	1092W	1776W
Recommended battery capacity Note.3		80 - 200Ah	60 - 150Ah	40 - 100Ah	40 - 100Ah	30 - 80Ah
Leakage current from battery (Typ.)		≤1mA				
CHARGE INDICATOR	LED	Red: Battery capacity is less than 80%. Yellow: Battery capacity is greater than 80%. Green: Standby or battery is full				
INPUT	Rated input voltage	100 - 240VAC 50 / 60Hz				
	Input voltage range Note.4	90 - 264VAC				
	Power factor (Typ.)	PF>0.96 @Full load				
	Input current (Typ.)	14A@100VAC				
	Inrush current (Typ.)	Cold start 75A @230VAC				
	Standby input power	< 6W				
PROTECTION	Efficiency (Typ.)	92%	92%	93%	93%	93%
	Short circuit Note.5	Protection type : Shut down output				
	Over voltage	>4.35V*N				
	Reverse polarity	By internal relay				
ENVIRONMENT	Over temperature	Shut down output, recovers automatically after temperature goes down				
	Working temperature	-10 - +40℃ (Refer to " Derating Curve")				
	Working humidity	0 - 90% RH				
	Storage temperature, humidity	-40 - +70℃, 0 - 95% RH				
	Cooling	Fan convection				
	Vibration resistance	10 – 50Hz, 2G 10min. 1cycle, 60min. each along X, Y, Z axes				
	SAFETY & EMC (Note.6)	Max. temperature rise	< 30℃ on casing			
Hi-Pot Insulation		i/p to o/p: 3000V (1 min)				
Safety standards		IEC62368				
EMC Emission		Parameter	Standard			Test Level I Note
		Conducted	EN55032 FCC PART15			Class B
		Radiated	EN55032 FCC PART15			Class B
		Harmonic Current	EN61000-3-2		
Voltage Flicker		EN61000-3-3			
EMC IMMUNITY	EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11					
OTHERS	MTBF	30000H				
	Dimension	288*168*89mm (L*W*H)				
	Weight	4800g				
NOTE	1.Modification for charger specification may be required for different battery specification. Please contact battery vendor and Green digital power for details. 2.All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature. 3.This is Green suggested range. Please consult your battery manufacturer for their suggestions about maximum charging current limitation. 4.Derating may be needed under low input voltages. Please check the derating curve for more details. 5.This protection mechanism is specified for the case the short circuit occurs after the charger is turned on. 6.The battery charger is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EM I testing of component power supplies."					


■ Block Diagram

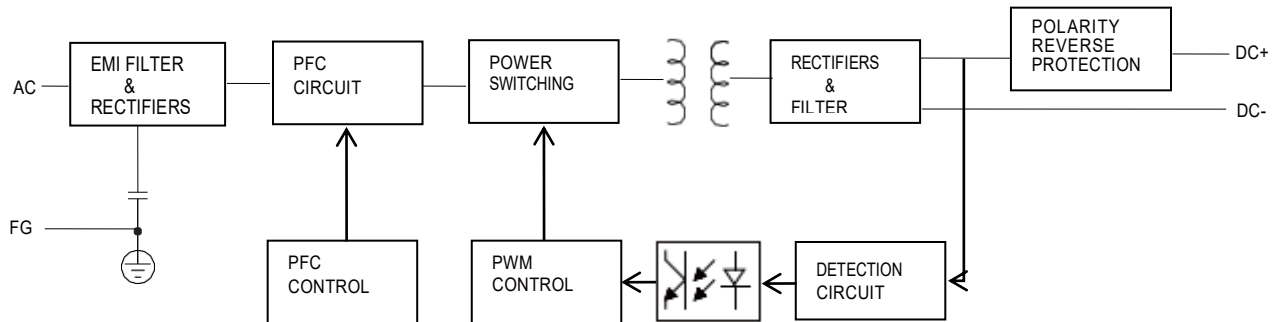

■ Derating Curve

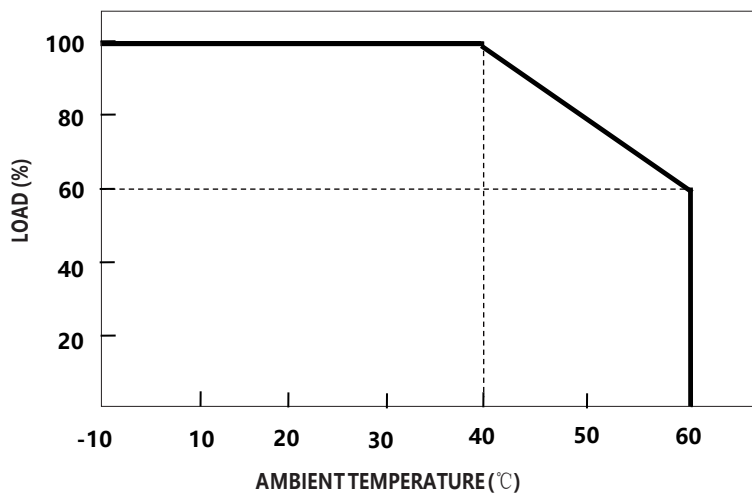


■ Static Characteristics

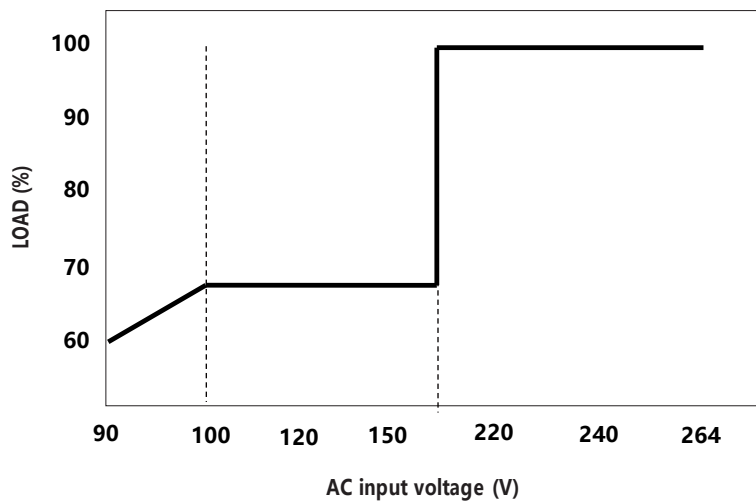


1.Charging Curve

© 4 stage charging curve(Li-ion & LiFePO4 battery charger)

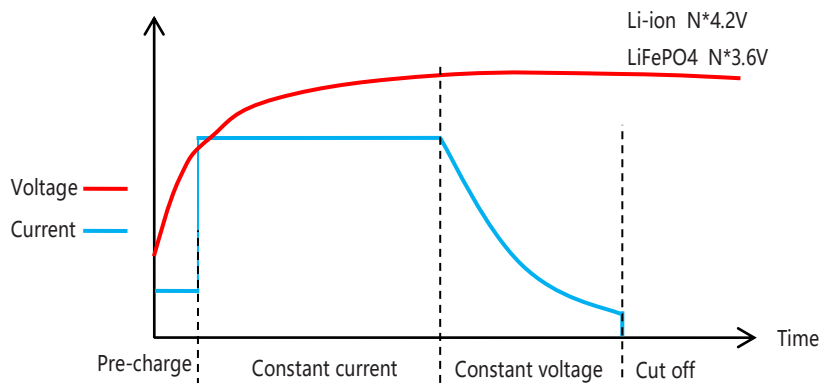

© 3 stage charging curve(Lead-Acid battery charger)

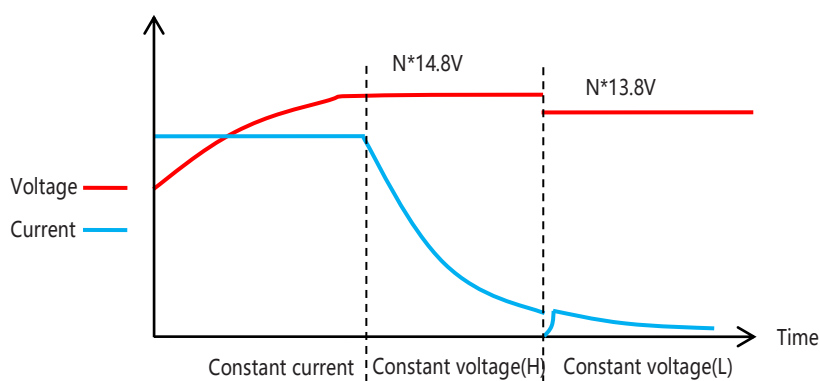


2.LED indication

Red ON: Charging, capacity < 80%
Red flashing: Error, Shorted or Reversed

Green ON: Full charged, or idle

Yellow ON: Charging, capacity >= 80%



■ Mechanical specification

