
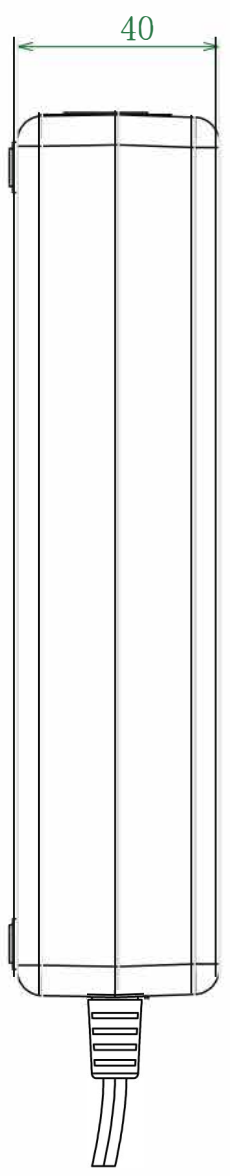
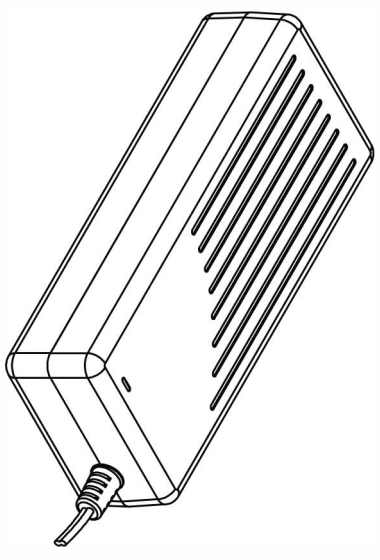
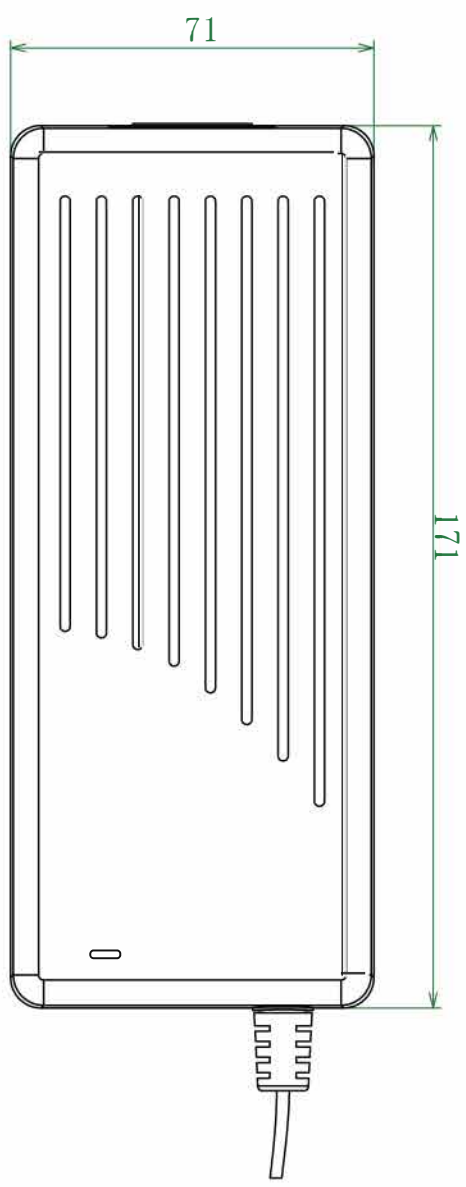


**L100-48F (57.6V 1.5A) 16S Li-Fe Battery Charger**

Item	Specification	Remark
<b>1.Input</b>		
Rating input voltage	100~240Vac 50/60Hz	
Input voltage range	90~264Vac	
Rating input current	1.5Arms	Input:100V Output:Full load
Max input power	100W	Input:100V Output:Full load
<b>2.Output</b>		
No load output voltage	DC57.6V	
Output voltage range	DC40.0~57.6V	
Suit with battery type	16S Li-Fe battery	
Charging current	1.5A $\pm$ 10%	
Charging voltage	DC57.6V $\pm$ 0.8V	
Charge-end current	$\leq$ 0.13A $\pm$ 0.03A	
Timer	-	
Max output power	86.4W	
Ripple voltage	$\leq$ 576mV	Full load
Charging LED	Red:Charging	
	Green:Full charge or idle	
Shorted	Yes	
Reversed	Yes	
Efficiency	$\geq$ 87%	Full load @220V
<b>3.Environment</b>		
Operate temperature	-10 ~ +40°C	
Operate humidity	< +90%	Relative humidity
Storage temperature	-40 ~ +70°C	
Storage humidity	0 ~ +95%	Relative humidity
Cooling	Natural	
Vibration resistance	5MM/50HZ/600S	Non-operating condition
Impact resistance	1 meter drop test 3 times	Non-operating condition
<b>4.Mechanical</b>		
Weight	400g	
Size	170X70X41MM	Casing only
Connector	Refer to order	
<b>Safety</b>		
Max. temperature rise	< 40°C on casing	
Safety approval	CE/cTUVus/CCC	
MTBF	30000H	
ESD	8.0KV	
Hi-Pot Insulation	i/p to o/p: 3000V (1 min)	

CU STOMERE VRE V	ZONE	DE SCRIPITON	CHA BY/DATE	APP BY/DATE
------------------	------	--------------	-------------	-------------

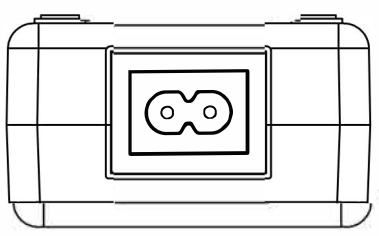

**Shenzhen Green Digital Power-Tech CO.,LTD**

TITLE: L100W		MATT:	
MODEL:		WEIGHT:	
DES BY:	CAD FILE:	UNIT: mm	TEXTURE NO
CHECK BY:	COLOR:	Paper Size: A4	SCALE: FT
APP BY:	FIN SH/ TREATME NT		DATE:
CUSTOMER P/N:			
PART NO.:			