

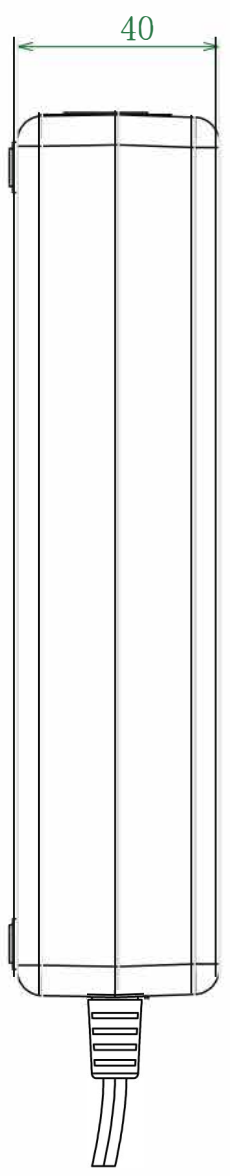
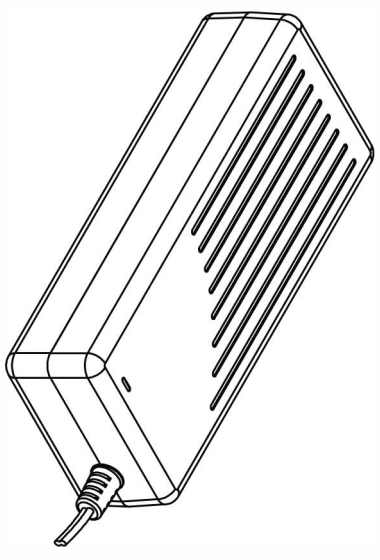


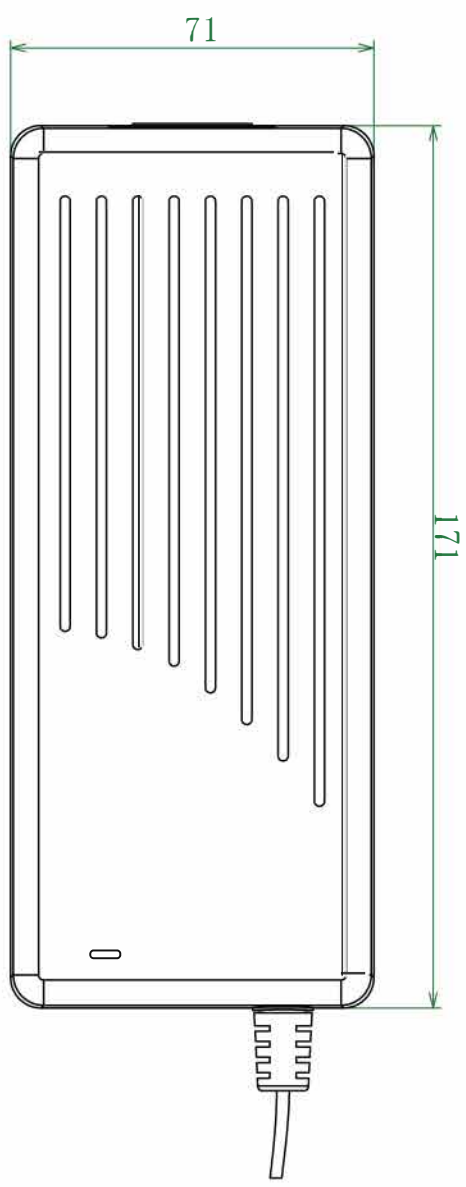

N100-24 (24V 2.8A) 20S NiMH/NiCd Battery Charger		
Item	Specification	Remark
1.Input		
Rating input voltage	100~240Vac 50/60Hz	
Input voltage range	90~264Vac	
Rating input current	1.5Arms	Input:100V Output:Full load
Max input power	100W	Input:100V Output:Full load
2.Output		
No load output voltage	DC 6.5V	
Output voltage range	DC 20 ~ 32V	
Suit with battery type	20S Ni-MH/Ni-Cd battery	
Charging current	2.8A ±10%	
Charging trickle	1/10 CC Pulse	
Max Charging voltage	DC 32V	
Main charge end condition	-DV ≥5mV /cell (TYP) or Vmax ≥1.6V/cell DT/dt≥0.8°C/min or Timer out.	For NiCd, Vmax is 1.8V/cell
Timer	8hours (default)	
Max output power	90W	
Ripple voltage	≤320mV	Full load
Charging LED	Red:Charging	
	Green:Full charge or idle	
Shorted	Yes	
Reversed	Yes	
Efficiency	≥87%	Full load @220V
3.Environment		
Operate temperature	-10 ~ +40°C	
Operate humidity	< +90%	Relative humidity
Storage temperature	-40 ~ +70°C	
Storage humidity	0 ~ +95%	Relative humidity
Cooling	Natural	
Vibration resistance	5MM/50HZ/600S	Non-operating condition
Impact resistance	1 meter drop test 3 times	Non-operating condition
4.Mechanical		
Weight	400g	
Size	170X70X41MM	Casing only
Connector	Refer to order	
5.Safety		
Max. temperature rise	< 40°C on casing	
Safety approval	CE/cTUVus/CCC	
MTBF	30000H	
ESD	8.0KV	
Hi-Pot Insulation	i/p to o/p: 3000V (1 min)	

CU STOMERE VRE V	ZONE	DE SCRIPITON	CHA BY/DATE	APP BY/DATE
------------------	------	--------------	-------------	-------------

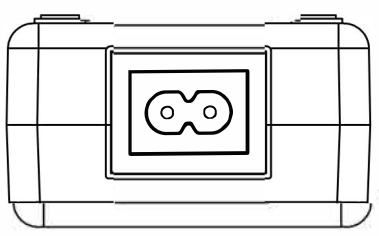

Shenzhen Green Digital Power-Tech CO.,LTD

TITLE: L100W		MATT:	
MODEL:		WEIGHT:	
DES BY:	CAD FILE:	UNIT: mm	TEXTURE NO
CHECK BY:	COLOR:	Paper Size: A4	SCALE: FT
APP BY:	FIN SH/ TREATME NT		DATE:
CUSTOMER P/N:			
PART NO.:			