
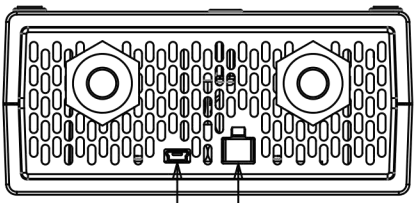


**G1200-588200 (58.8V 20.0A) 14S Li-ion Battery Charger**




项目 Item	规格 Specification	备注 Remark
<b>1.输入特性 Input</b>		
额定输入电压 Rating input voltage	100~240Vac 50/60Hz	
输入电压范围 Input voltage range	90~264Vac	
额定输入电流 Rating input current	13.0Arms	Input:100V Output:Full load
功率因素PF value	≥0.96	
待机功率Standby input power	≤4W	
最大输入功率 Max input power	1300W	Input:100V Output:Full load
<b>2.输出特性 Output</b>		
空载输出电压 No load output voltage	DC58.8V ±1%	
输出电压范围 Output voltage range	DC35.0~58.8V	
适用电池 Suit with battery type	14S Li-ion battery	
恒定电流 Charging current	20.0A ±10%	
恒定电压 Charging voltage	DC58.8V ±1%	
预充电流 Pre-charge	4.0A ±10%	电压≤42.0V预充
充电结束电流 Charge-end current	≤2.0A±10%	
定时器 Timer	-	
最大输出功率 Max output power	1176W	
纹波电压 Ripple voltage	≤588mV	满载 Full load
LCD显示	显示电压, 电流, 电量 Display voltage,current,capacity	
通信功能Communication function	USB/CAN	可设置电池类型(铅酸、锂电、铁锂)、充电电压、充电电流 The battery type (lead acid, lithium battery,LiFePO4 battery), charging voltage and charging current can be set
输出短路保护 Shorted	有Yes	
输出反接保护 Reversed	有Yes	
效率 Efficiency	≥92%	满载 Full load @220V
<b>3.环境要求 Environment</b>		
工作温度 Operate temperature	-10 ~ +40°C	
工作湿度 Operate humidity	< +90%	相对湿度 Relative humidity
存储温度 Storage temperature	-40 ~ +70°C	
存储湿度 Storage humidity	0 ~ +95%	相对湿度 Relative humidity
冷却方式 Cooling	风扇 Fan	
抗振动 Vibration resistance	5MM/50HZ/600S	非运行状况 Non-operating condition
抗冲击 Impact resistance	1 meter drop test 3 times	非运行状况 Non-operating condition
<b>4.结构 Mechanical</b>		
重量 Weight	2.3Kg	
尺寸 Size	280X135X60MM	外壳尺寸Casing only
接线端子 Connector	按客户要求制定 Refer to order	
<b>5.安全特性 Safety</b>		
最大温升 Max. temperature rise	< 40°C on casing	
安全认证 Safety approval	EN60950(LVD) ,EN55032(EMC)	
平均无故障时间 MTBF	30000H	
静电等级 ESD	8.0KV	
隔离耐电压 Hi-Pot Insulation	i/p to o/p: 3000V (1 min)	

CUSTOMER REV	REV	ZONE	DESCRIPTION	CHA BY/DATE	APP BY/DATE



CAN通信接口  
USB通信接口

1.8mDC输入线  
1.8mDC输出线  
黑色“-”  
红色“+”

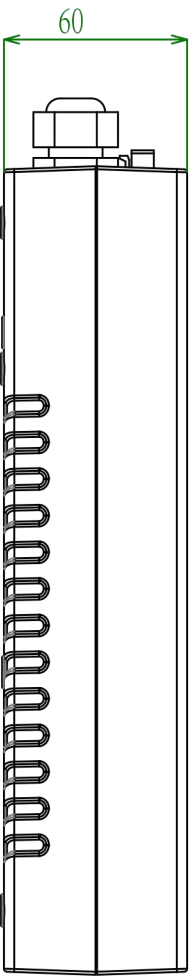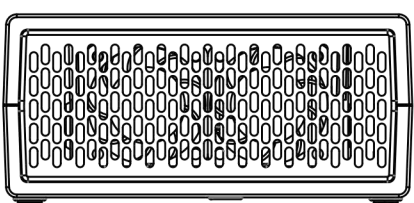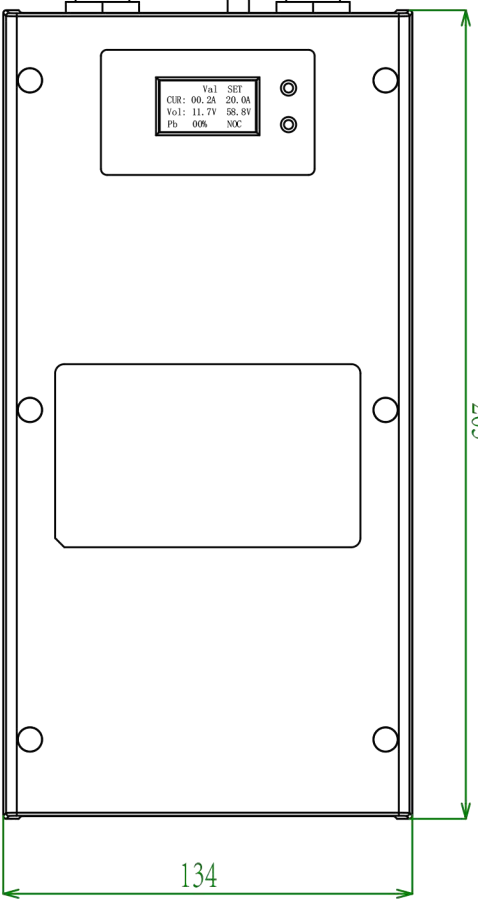

Shenzhen Green Digital Power-Tech CO., LTD

TITLE:	MATL:
MODEL: 1200W-XXXXXX	WEIGHT:
DES BY: CAD	TEXTURE:
UNIT: mm	NO.
COLOR:	SCALE: Fit
FINISH/TREATMENT:	DATE:
PAPER SIZE: A4	
CUSTOMER P/N:	
PART NO.:	
CHECK BY:	
APP BY:	