
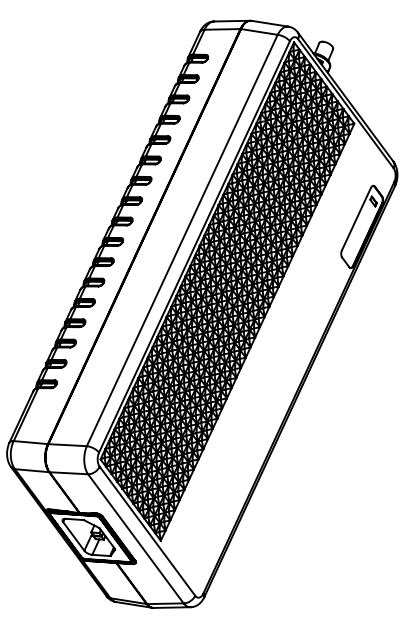
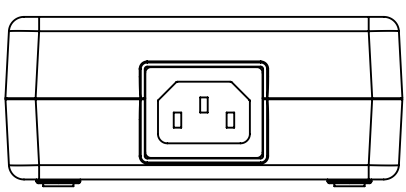
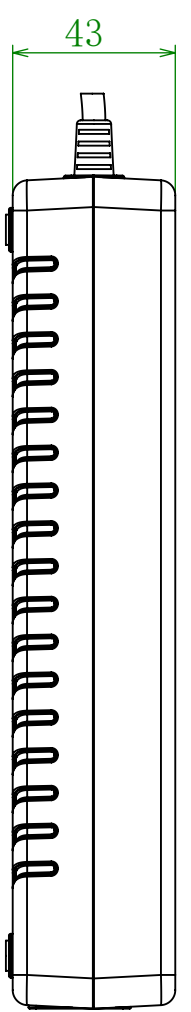


**G300-360080 (36.0V 8.0A) 10S Li-Fe Battery Charger**

Item	Specification	Remark
1.Input		
Rating input voltage	100~240Vac 50/60Hz	
Input voltage range	90~264Vac	
Rating input current	4.5Arms	Input:100V Output:Full load
Max input power	320W	Input:100V Output:Full load
2.Output		
No load output voltage	DC36.0V \pm 1%	
Output voltage range	DC25.0~36.0V	
Suit with battery type	10S Li-Fe battery	
Charging current	8.0A \pm 7%	
Charging voltage	DC36.0V \pm 1%	
Pre-charge	1.6A \pm 7%	Voltage \leq 30V Pre-charge
Charge-end current	\leq 0.8A \pm 10%	
Timer	-	
Max output power	288W	
Ripple voltage	\leq 430mV	Full load
Charging LED	Red LED flashing	2Hz Error
	Green LED flashing	0.45Hz No battery; 0.83Hz $<$ 25% Capacity; 1.25Hz \geq 25% Capacity; 1.66Hz \geq 50% Capacity; 2.5Hz \geq 75% Capacity;
	Green LED on	Full
Shorted	Yes	
Reversed	Yes	
Efficiency	\geq 95%	Full load @220V
3.Environment		
Operate temperature	-10 ~ +40 $^{\circ}$ C	
Operate humidity	$<$ +90%	Relative humidity
Storage temperature	-40 ~ +70 $^{\circ}$ C	
Storage humidity	0 ~ +95%	Relative humidity
Cooling	Natural	
Vibration resistance	5MM/50HZ/600S	Non-operating condition
Impact resistance	1 meter drop test 3 times	Non-operating condition
4.Mechanical		
Weight	1.3Kg	
Size	220X105X44MM	Casing only
Connector	Refer to order	
5.Safety		
Max. temperature rise	$<$ 40 $^{\circ}$ C on casing	
Safety approval	CB/CE/FCC	
MTBF	30000H	
ESD	8.0KV	
Hi-Pot Insulation	i/p to o/p: 3000V (1 min)	

CUSTOMER REV	REV	ZONE	DESCRIPTION	CHA BY/DATE	APP BY/DATE

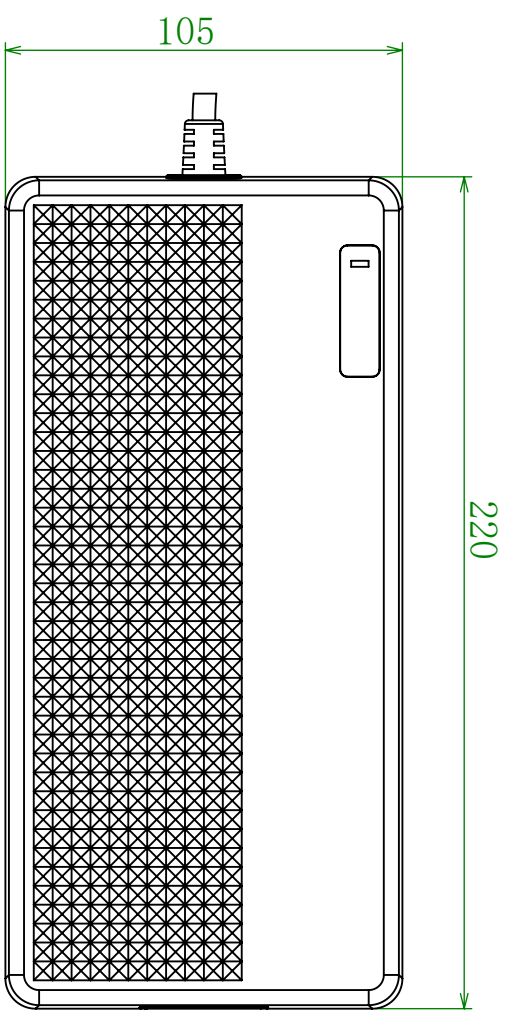

Shenzhen Green Digital Power-Tech CO., LTD

TITLE: _____ MATL: _____

MODEL: **G300-XXXXXX** WEIGHT: _____

DES BY: _____ UNIT: mm TEXTURE NO. _____

CHECK BY: _____ COLOR: _____ Paper Size: A4 SCALE: **Fit**

APP BY: _____ FINISH/TREATMENT: _____ DATE: _____

PART NO.: _____
CUSTOMER P/N: _____

