
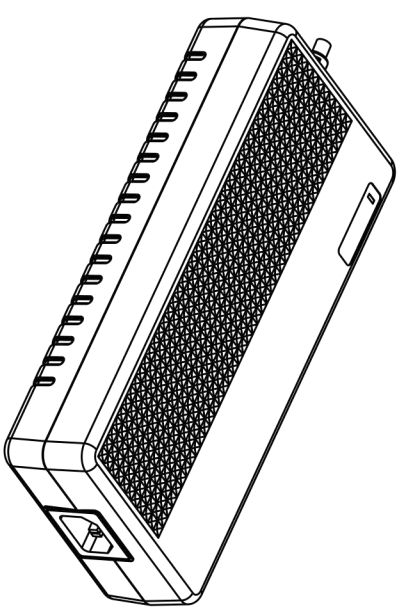
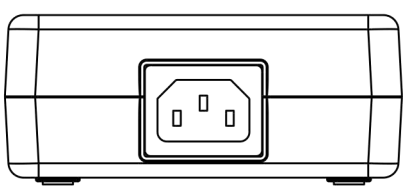
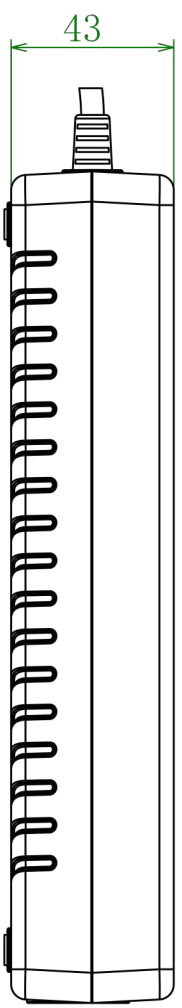


**G300-330100 (33.0V 10.0A) Power Adapter**

Item	Specification	Remark
<b>1.Input</b>		
Rating input voltage	100~240Vac 50/60Hz	
Input voltage range	90~264Vac	
Rating input current	4.5Arms	Input:100VAC Output:Full load
Power factor	PF>0.98	Input:115VAC Output:Full load
	PF>0.94	Input:230VAC Output:Full load
Efficiency	94.0%	Input:115VAC Output:Full load
	96.0%	Input:230VAC Output:Full load
Standby power	200mW	Input:115VAC&230VAC
Inrush current	50A/115VAC 80A/230VAC	Cold-start and 25°C,Full-load
Leakage current	<500uA	240VAC
<b>2.Output</b>		
Output voltage	33V	
Output current range	0-10A	
Rated maximum power	330W	
Voltage tolerance	±2%	
Voltage regulation	±1%	
Load regulation	±5%	
Start-up time	300ms	Input:115VAC Output:Full load
Rise time	30ms	Input:115VAC Output:Full load
Hold time	20ms	Input:115VAC Output:Full load
Ripple voltage	200mV	20MHz , AC coupling mode, connected in parallel with 0.1uf ceramic capacitor and 47uf electrolytic capacitor
<b>3.Protect</b>		
OLP	110-160% , Lock Mode	
OVP	Lock Mode	
SCP	Lock Mode	
OTP	Lock Mode	
<b>4.Environment</b>		
Operate temperature	-10 ~ +40°C	
Operate humidity	< +90%	Relative humidity
Storage temperature	-40 ~ +70°C	
Storage humidity	0 ~ +95%	Relative humidity
Cooling	Natural	
Vibration resistance	5MM/50HZ/600S	Non-operating condition
Impact resistance	1 meter drop test 3 times	Non-operating condition
<b>5.Mechanical</b>		
Weight	1.3Kg	
Size	220X105X43MM	Casing only
Connector	Refer to order	
<b>6.Safety</b>		
Max. temperature rise	< 40°C on casing	
Safety approval	CE	
MTBF	30000H	
ESD	8.0KV	
Hi-Pot Insulation	i/p to o/p: 3000V (1 min)	

CUSTOMER REV	REV	ZONE	DESCRIPTION	CHA BY/DATE	APP BY/DATE

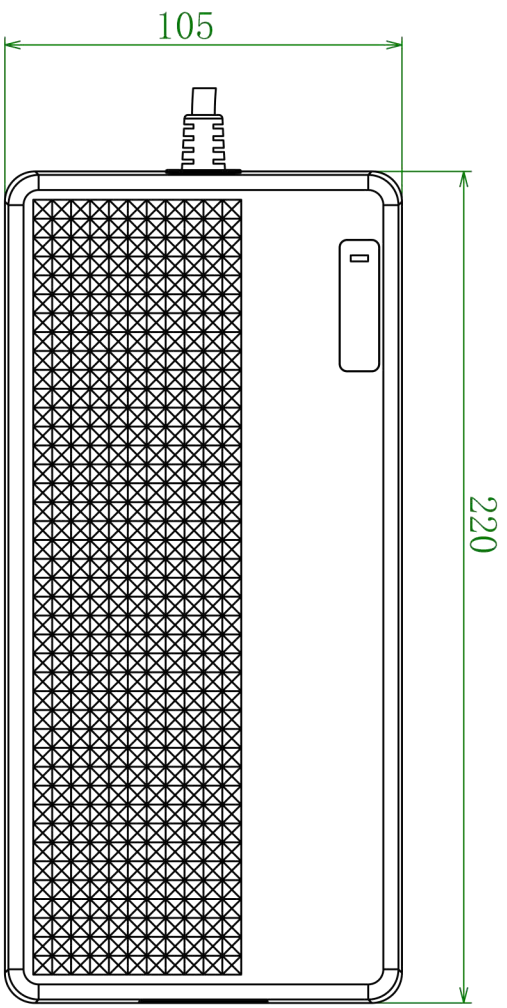

深圳市谷润数字电源有限公司

TITLE:		MATEL:	
MODEL:		G300-XXXXXX	
DES BY:	CAD FILE:	UNIT : mm	WEIGHT:
CHECK BY:	COLOR:	Paper Size:A4	TEXTURE NO.
CUSTOMER P/N:	FINISH/TREATMENT:	SCALE:	Fit
PART NO.:	APP BY:	DATE:	