



■ Features

- Charger for lithium batteries (Li-ion, LiFePO4 and lithium manganese) and Lead-Acid batteries
- Built-in 4 stage charging curve (For Lithium batteries) and 3 stage charging curve (For Lead-Acid batteries)
- Universal AC input / Full range (90-264 VAC), 1200W output Max
- Built-in active PFC function, 94% efficiency
- Protection: Short circuit / Over voltage / Over temperature / Battery over voltage / Battery reverse polarity protection
- 1 years warranty

■ Applications


- EV, robot and AGV
- Energy storage system
- Industrial applications
- Electric motorcycle / Electric sweeper

■ Description

G1300 is a single output max. 1200W AC/DC desktop type charger with 4 and 3 stage charging curve. In addition to the embedded pre-defined charging curves, the default curve is programmable and thus able to accommodate different types of batteries, such as Lead-acid batteries (gel, flooded and AGM) and Lithium batteries (Li-ion, LiFePO4 and Lithium manganese). G1300 can be set different charging voltage value, charging current value and charging end current value through CAN bus, according to customer's own requirements. Using with optional CAN meter, it can display the setting voltage, current, running voltage, current and battery capacity.

■ Model serial P/N


G1300-XXXXYY

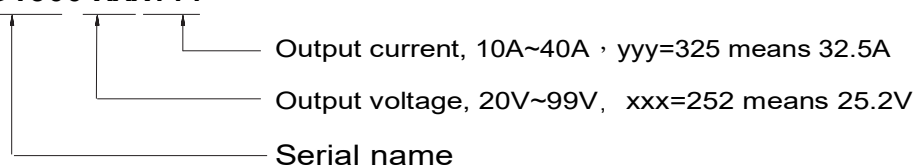


Li-ion battery charger (Only the adopted models are listed in table, for other output please reach our sales)

MODEL		G1300-294400	G1300-420280	G1300-546220	G1300-588200	G1300-840140	
OUTPUT	Charge voltage	29.4V±1%	42.0V±1%	54.6V±1%	58.8V±1%	84.0V±1%	
	Charge voltage range	17.5-29.4V	25.0-42.0V	32.5-54.6V	35-58.8V	50.0-84.0V	
	Charge current @AC230V	40.0A±10%	28.0A±10%	22.0A±10%	20A±10%	14.0A±10%	
	Pre-charge current	8A±10%	5.6A±10%	4.4A±10%	4.0A±10%	2.8A±10%	
	Charge-end current	≤4A ±20%	≤2.8A ±20%	≤2.2A ±20%	≤2.0A ±20%	≤1.4A ±20%	
	Max. output@AC120~240V	1200W	1200W	1200W	1200W	1200W	
	Recommended battery capacity Note.3	40 - 400Ah	28 - 280Ah	22 - 220Ah	20 - 200Ah	14 - 140Ah	
	Leakage current from battery (Typ.)	≤1mA					
CHARGE INDICATOR	Multi-color LED or LCD panel	Red LED flashing: Error Red LED on: Charging (battery < 80%) Yellow LED on: Almost full (80%~99%) Green LED on: Fully charged or standby LCD Digital Panel: Optional accessory					
COMMUNICATION FUNCTION	CAN / 485 ; CAN is default. Note.1	Charging parameters (voltage, current, battery type) can be set via CAN port. User can use PC terminal or our LCD display panel accessory to set these parameters.					
INPUT	Rated input voltage	100 - 240VAC 50 / 60Hz					
	Input voltage range Note.4	90 - 264VAC					
	Power factor (Typ.)	PF>0.96 @Full load					
	Input current (Typ.)	14A@100VAC					
	Inrush current (Typ.)	Cold start 75A @230VAC					
	Standby input power	< 4W					
PROTECTION	Efficiency (full load @ AC230V)	93%	94%	94%	94%	94%	
	Short circuit Note.5	Protection type : Shut down output					
	Over voltage	110% max. output					
	Reverse polarity	By internal relay					
ENVIRONMENT	Over temperature	Shut down output, recovers automatically after temperature goes down					
	Working temperature	-10 - +40°C (Refer to " Derating Curve")					
	Working humidity	0 - 90% RH					
	Storage temperature, humidity	-40 - +70°C, 0 - 95% RH					
	Cooling	Fan convection					
	Vibration resistance	10 - 50Hz, 2G 10min. 1cycle, 60min. each along X, Y, Z axes					
SAFETY & EMC (Note.6)	Max. temperature rise	< 40°C on casing					
	Hi-Pot Insulation	i/p to o/p: 3000V (1 min)					
	Safety standards	IEC62368					
	EMC Emission	Parameter	Standard			Test Level I Note	
		Conducted	EN55032 FCC PART15			Class B	
		Radiated	EN55032 FCC PART15			Class B	
		Harmonic Current	EN61000-3-2				
		Voltage Flicker	EN61000-3-3				
	EMC IMMUNITY	EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11					
OTHERS	MTBF	30000H					
	Dimension	278*145*47.7mm (L*W*H)					
	Weight	1800g					
NOTE	1.Modification for charger specification may be required for different battery specification. Please contact battery vendor or Green digital power for details. 2.All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 3.This is general suggested. Please consult your battery manufacturer about maximum charging current limitation. 4.Derating is needed at AC100~120V input or above 40°C ambient. Please check the derating curve for more details. 5.This protection mechanism is specified for the case the short circuit occurs after the charger is turned on. 6.The battery charger is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EM I testing of component power supplies."						


■ Block Diagram

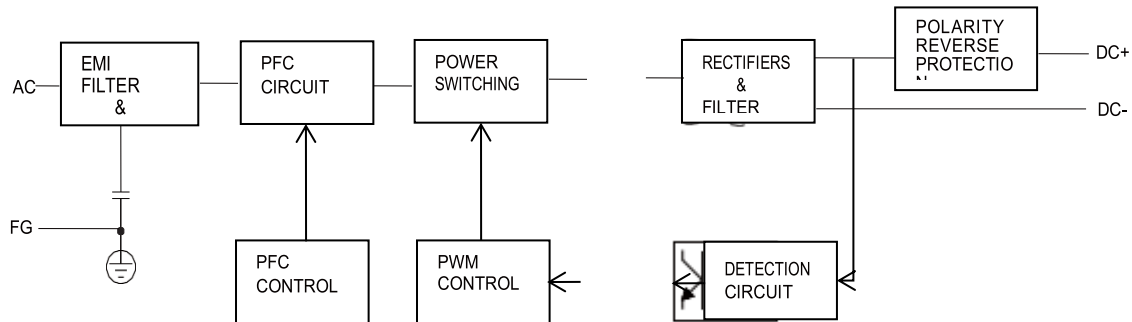

■ Derating Curve for ambient

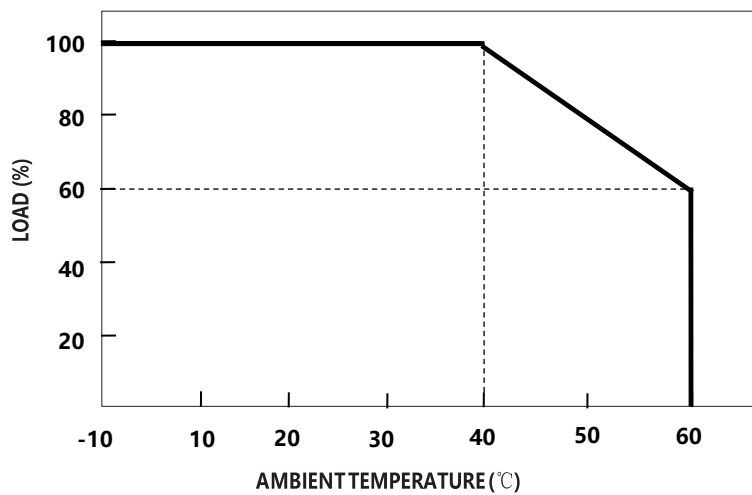


■ Derating curve for AC input voltage

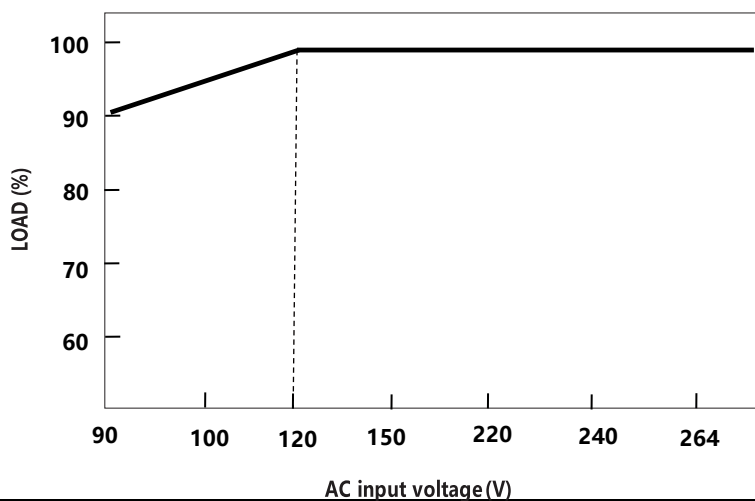


1. Charging Curve

© 4 stage charging curve (Li-ion battery charger)

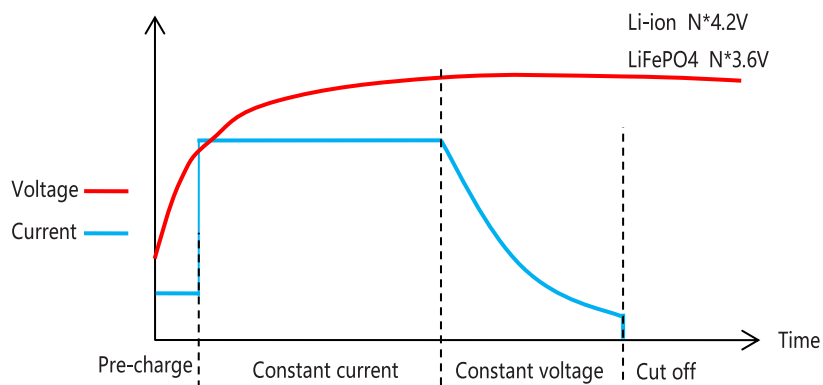

© 3 stage charging curve (Lead-Acid battery charger)

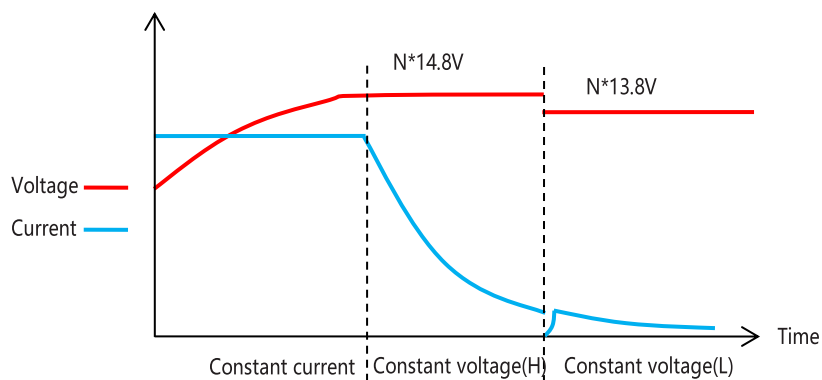

■ Mechanical specification

