



■ Features

- Charger for lithium batteries (Li-ion,LiFePO4and lithium manganese) and Lead-Acid batteries
- Built- in 4 stage charging curve(For Lithium batteries) and 3 stage charging curve(For Lead-Acid batteries)
- Universal AC input / Full range(90-264V~)
- Built- in active PFC function
- Protection: Short circuit / Over voltage /Over temperature /Battery over voltage / Battery reverse polarity protection
- 1 years warranty


■ Applications

- Radio system backup solution
- Electric scooter charger
- Surveillance system
- Electric motorcycle\Electric sweeper

■ Description

G168 is a single output 168W AC/DC desktop type charger with 4 and 3 stage charging curve, suitable for lithium battery (lithium ion, lithium iron phosphate, lithium manganese) and lead-acid battery (colloid battery, liquid battery, AGM battery). When charging, the LED can indicate the battery capacity when charging.


■ Mode Encoding

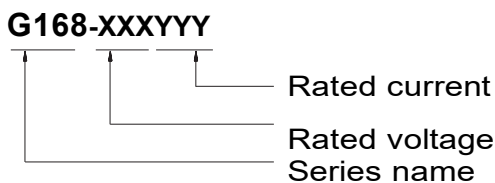


SPECIFICATION (Lead-Acid battery charger)

MODEL		G168-148110	G168-296056	G168-444037	G168-592028
OUTPUT	Charge voltage (High voltage)	14.8V±1%	29.6V±1%	44.4V±1%	59.2V±1%
	Charge voltage range	10.0-14.8V	20.0-29.6V	30.0-44.4V	40.0-59.2V
	Float charge (Low voltage)	13.8V±1%	27.6V±1%	41.4V±1%	55.2V±1%
	Charge current	11.0A±7%	5.6A±7%	3.7A±7%	2.8A±7%
	Charge-end current	≤2.2A ± 10%	≤1.12A ± 10%	≤0.74A ± 10%	≤0.56A ± 10%
	Rated power	162.8W	165.76W	164.28W	165.76W
	Recommended battery capacity Note.3	60 - 100Ah	30- 60Ah	20 - 40Ah	15 - 30Ah
	Leakage current from battery (Typ.)	≤1mA			
CHARGING LED	Red LED flashing	2Hz Error			
	Green LED flashing	Idle			
	Red LED on	Charging			
	Green LED on	Full charged			
INPUT	Rated input voltage	100 - 240VAC 50 / 60Hz			
	Input voltage range Note.4	90 - 264VAC			
	Power factor (Typ.)	PF>0.98@Full load, Input:115VAC ; PF>0.94 @Full load, Input:230VAC			
	Input current (Typ.)	2.2A@100VAC			
	Inrush current (Typ.)	75A/230VAC (cold start)			
	Standby input power	<1W			
	Efficiency (Typ.)	94%	94%	94%	94%
PROTECTION	Short circuit Note.5	Protection type : Shut down output			
	Over voltage	Protection type : Shut down output			
	Reverse polarity	Protection type : Shut down output			
	Over temperature	-			
ENVIRONMENT	Working temperature	-10 - +40°C (Refer to " Derating Curve")			
	Working humidity	0 - 90% RH			
	Storage temperature, humidity	-40 - +70°C, 0- 95% RH			
	Cooling	Natural convection			
	Vibration resistance	10-50Hz,2G10min.1cycle,60min.eachalongX,Y,Zaxes			
SAFETY&EMC (Note.6)	Max. temperature rise	< 40°C on casing			
	Hi-Pot Insulation	i/p to o/p: 3000V (1 min)			
	Safety approval	CE/PSE/SAA/FCC/CCC/cTUVus/CB/BS			
	EMC Emission	Parameter	Standard		Test Level I Note
		Conducted	EN55032 FCC PART15		Class B
		Radiated	EN55032 FCC PART15		Class B
		Harmonic Current	EN61000-3-2	
Voltage Flicker	EN61000-3-3			
EMC IMMUNITY	EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11				
OTHERS	MTBF	30000H			
	Dimension	175*72*40mm (L*W*H)			
	Weight	680g			
NOTE	<p>1. Modification for charger specification may be required for different battery specification. Please contact battery vendor and Green digital power for details.</p> <p>2. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>3. This is Green suggested range. Please consult your battery manufacturer for their suggestions about maximum charging current limitation.</p> <p>4. Derating may be needed under low input voltages. Please check the derating curve for more details.</p> <p>5. This protection mechanism is specified for the case the short circuit occurs after the charger is turned on.</p> <p>6. The battery charger is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives.</p>				


■ Block Diagram

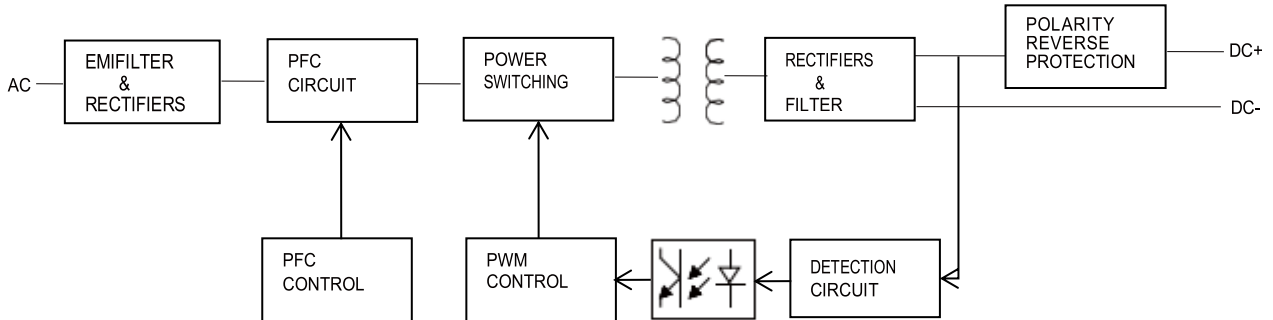

■ Derating Curve

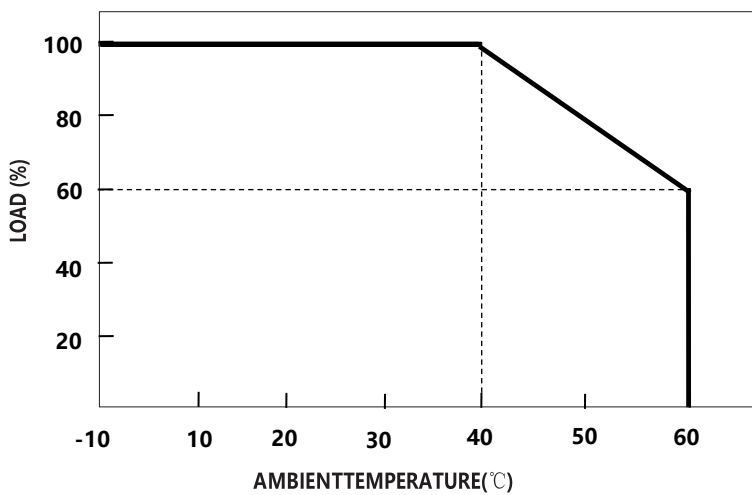


■ Static Characteristics

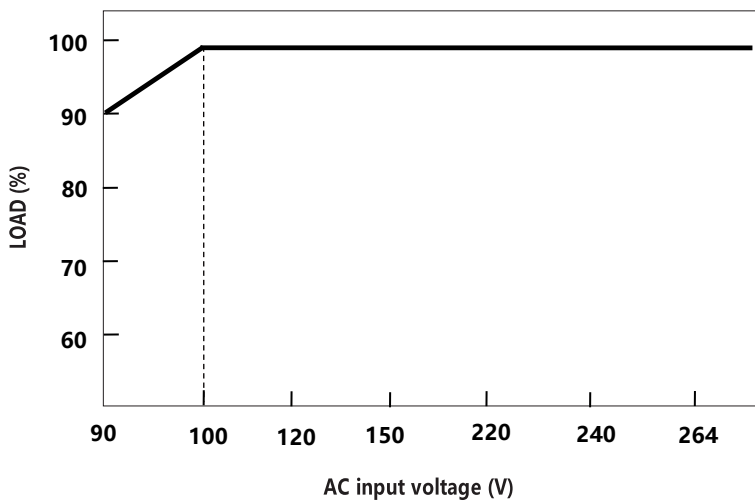


■ **Charging Curve**





© 4stage charging curve(Li-ion battery charger)

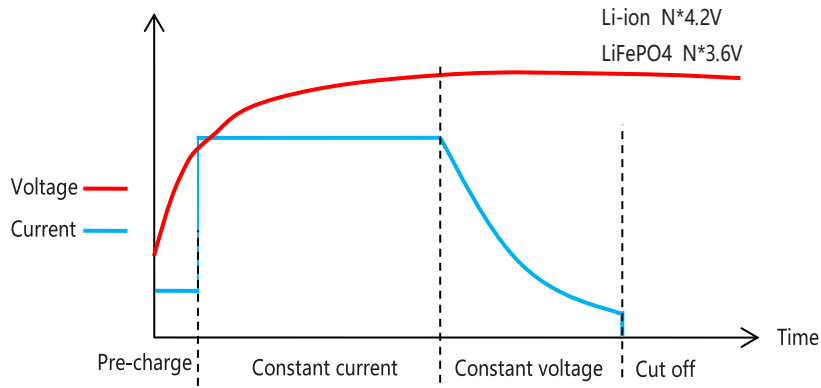

© 3stage charging curve(Lead-Acid battery charger)

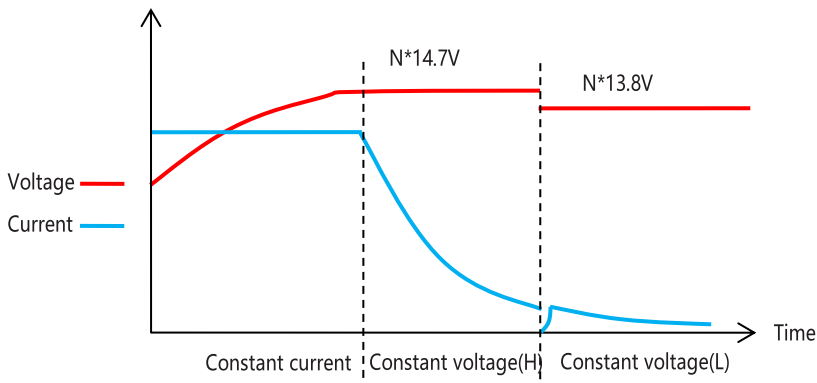

■ Mechanical specification

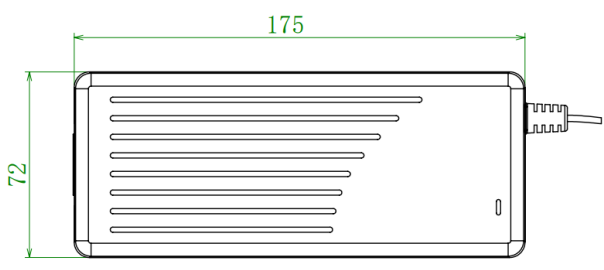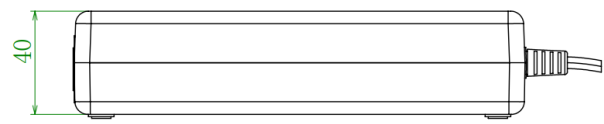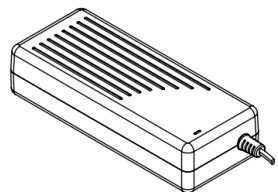	1	2	3	4	5	6	7	8	9	10																									
A							CUSTOMER REV	REV	ZONE	DESCRIPTION	CHA BY/DATE	APP BY/DATE																							
B																																			
C																																			
D																																			
E																																			
F																																			
G							<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="4" style="text-align: center;">Shenzhen Green Digital Power Tech CO.,LTD</td> </tr> <tr> <td colspan="2">TITLE:</td> <td colspan="2">MATEL:</td> </tr> <tr> <td colspan="2">MODEL: G168W-XXXXXX</td> <td colspan="2">WEIGHT:</td> </tr> <tr> <td>DES BY:</td> <td>CAD FILE:</td> <td>UNIT: mm</td> <td>TEXTURE NO.</td> </tr> <tr> <td>CHECK BY:</td> <td>COL OR:</td> <td>Paper Size: A4</td> <td>SCALE: Fit</td> </tr> <tr> <td>APP BY:</td> <td>FINISH/TREATMENT:</td> <td>DATE:</td> <td></td> </tr> </table>					Shenzhen Green Digital Power Tech CO.,LTD				TITLE:		MATEL:		MODEL: G168W-XXXXXX		WEIGHT:		DES BY:	CAD FILE:	UNIT: mm	TEXTURE NO.	CHECK BY:	COL OR:	Paper Size: A4	SCALE: Fit	APP BY:	FINISH/TREATMENT:	DATE:	
Shenzhen Green Digital Power Tech CO.,LTD																																			
TITLE:		MATEL:																																	
MODEL: G168W-XXXXXX		WEIGHT:																																	
DES BY:	CAD FILE:	UNIT: mm	TEXTURE NO.																																
CHECK BY:	COL OR:	Paper Size: A4	SCALE: Fit																																
APP BY:	FINISH/TREATMENT:	DATE:																																	
H	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">PART NO.:</td> <td style="width: 50%;"></td> </tr> <tr> <td>CUSTOMER P/N:</td> <td></td> </tr> </table>						PART NO.:		CUSTOMER P/N:																										
PART NO.:																																			
CUSTOMER P/N:																																			
	1	2	3	4	5	6	7	8	9	10																									