



■ Features

- Charger for lithium batteries (Li-ion, LiFePO4 and lithium manganese) and Lead-Acid batteries
- Built- in 2-stage charging curve(For Lithium batteries) and 3-stage charging curve(For Lead-Acid batteries)
- Universal AC input, wide range cover 90-264V
- Small size , only 75*43*28mm
- High efficiency, >91% at AC 90V input
- Protection: Short circuit, OCP, OVP & reverse polarity
- 1years warranty

■ Applications

- Power tools & Drones
- Electric scooter
- Surveillance system
- Consumer electronic devices

■ Description

GaN065 is a single output 65W AC/DC desktop type charger with 2 and 3 stage charging curve, The different curves are suitable for different batteries, such as Lead- acid batteries (gel, flooded and AGM) and Lithium batteries(Li-ion, LiFePO4 and Lithium manganese).

■ Mode Encoding


GaN065-XXXYYY




SPECIFICATION(Li-Fe battery charger)

MODEL		GaN065-144033	GaN065-180028	GaN065-288017	
OUTPUT	Charge voltage	14.4V±1%	18.0V±1%	28.8V±1%	
	Charge voltage range	10-14.4V	12.5-18V	20-28.8V	
	Charge current	3.3A±10%	2.8A±10%	1.7A±10%	
	Pre-charge current	-	-	-	
	Charge-end current	≤0.33A ±20%	≤0.28A ±20%	≤0.17A ±20%	
	Rated power	47.52W	50.4W	48.96W	
	Recommended battery capacity Note.3	5 - 40Ah	3 - 30Ah	2 - 20Ah	
	Leakage current from battery (Typ.)	≤2mA			
CHARGE INDICATOR	LED indication	Red: Charging. Green: Full or Idle			
INPUT	Rated input voltage	100 - 240VAC 50 / 60Hz			
	Input voltage range Note.4	90 - 264VAC			
	Power factor (Typ.)	PF>0.55@AC100V, full load			
	Input current (Typ.)	1.2A@100VAC			
	Inrush current (Typ.)	Cold start 75A @230VAC			
	Standby input power	<0.5W			
	Efficiency (Typ.)	92.5%			
PROTECTION	Short circuit	Yes			
	Over voltage	Yes			
	Reverse polarity	Yes			
	Over temperature	-			
ENVIRONMENT	Working temperature	-10 - +40°C (Refer to " Derating Curve")			
	Working humidity	0 - 90% RH			
	Storage temperature, humidity	-40 - +70°C, 0 - 95% RH			
	Cooling	Natural convection			
	Vibration resistance	10 - 50Hz, 2G 10min. 1cycle, 60min. each along X, Y, Z axes			
SAFETY&EMC (Note.6)	Max. temperature rise	< 40°C on casing			
	Hi-Pot Insulation	i/p to o/p: 3000V (1 min)			
	Safety standards	IEC62368-1			
	EMC Emission	Parameter	Standard		Test Level Note
		Conducted	EN55032 FCC PART15		Class B
		Radiated	EN55032 FCC PART15		Class B
		Harmonic Current	EN61000-3-2	
Voltage Flicker		EN61000-3-3		
EMC IMMUNITY	EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11				
OTHERS	MTBF	30000H			
	Dimension	75*43*28.5mm (L*W*H)			
	Weight	120g			
NOTE	<p>1. Modification for charger specification may be required for different battery specification. Please contact battery vendor and Green digital power for details.</p> <p>2. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>3. This is Green suggested range. Please consult your battery manufacturer for their suggestions about maximum charging current limitation.</p> <p>4. Derating may be needed under low input voltages. Please check the derating curve for more details.</p> <p>5. This protection mechanism is specified for the case the short circuit occurs after the charger is turned on.</p> <p>6. The battery charger is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives.</p> <p>7. AC Inlet is ICE320-C8, DC cord is 1.5m 2*18AWG wires, DC terminal is defined when order.</p>				


■ Block Diagram

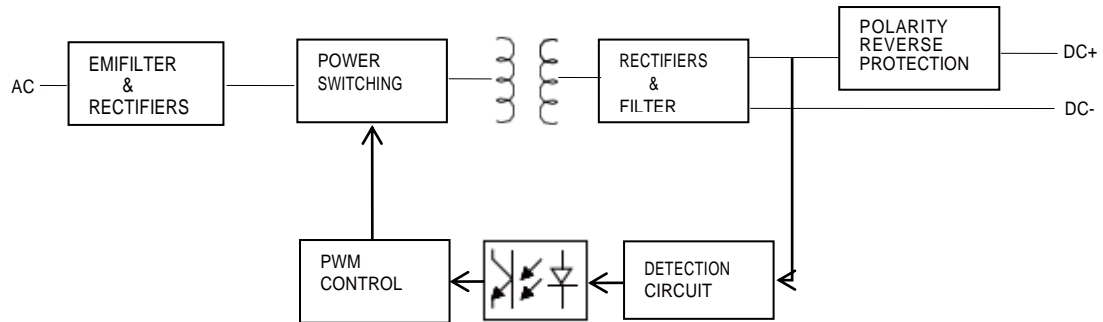

■ Derating Curve

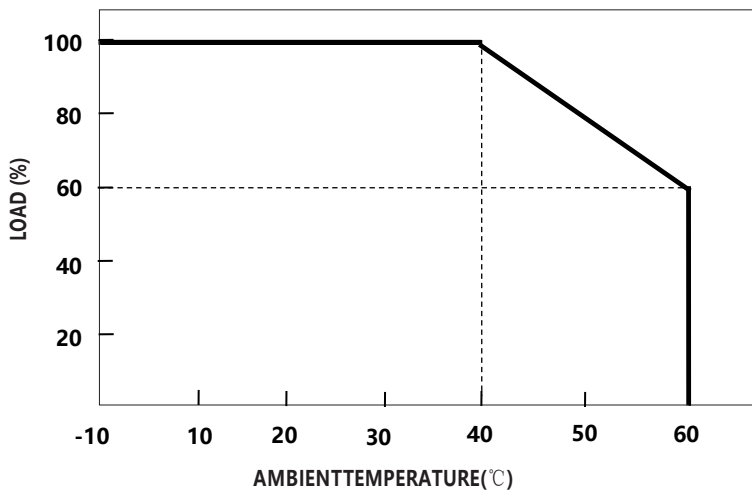


■ static Characteristics

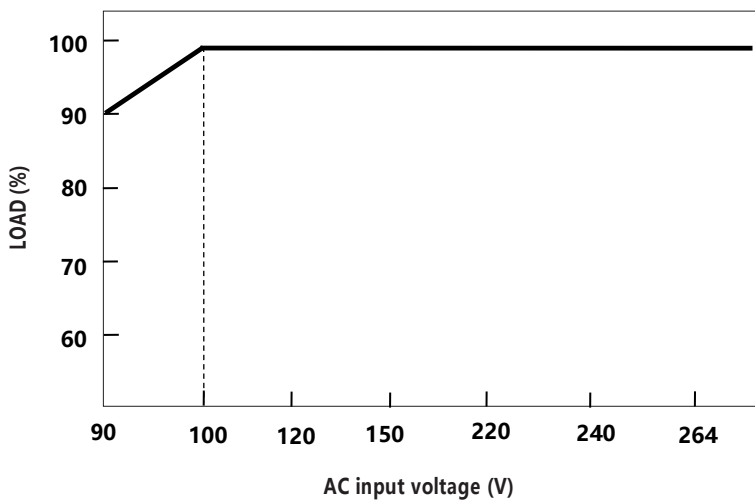


■ **Charging Curve**

◎ 2stage charging curve(Li-ion battery charger)

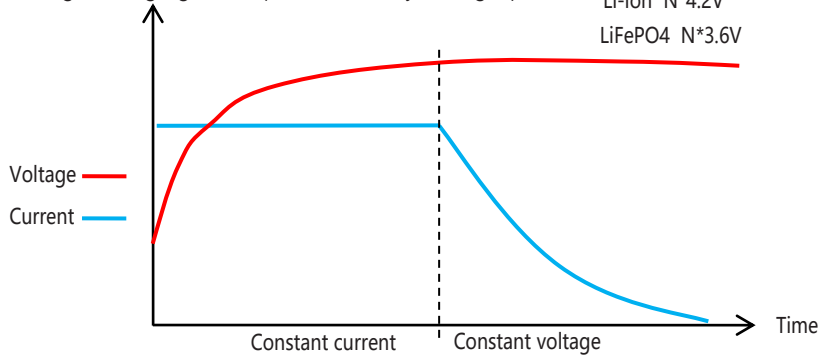

◎ 3stage charging curve(Lead-Acid battery charger)

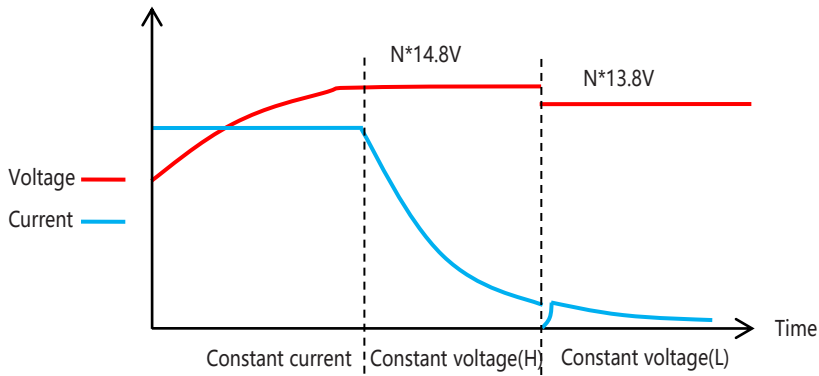

■ **Mecanical specification**

1	2	3	4	5	6	7	8	9	10																																																												
						CUSTOMER	DESCRIPTION	CHA	APP																																																												
						REV	REV	BY/DATE	BY/DATE																																																												
<table border="1" style="font-size: small;"> <tr><th colspan="2">TOLERANCE FOR METAL</th></tr> <tr><th>DIVISION</th><th>TOLERANCE</th></tr> <tr><td>-10</td><td>±0.06</td></tr> <tr><td>10-30</td><td>±0.11</td></tr> <tr><td>30-50</td><td>±0.13</td></tr> <tr><td>50-80</td><td>±0.15</td></tr> <tr><td>80-120</td><td>±0.18</td></tr> <tr><td>120-180</td><td>±0.20</td></tr> <tr><td>180-250</td><td>±0.25</td></tr> <tr><td>250-400</td><td>±0.30</td></tr> </table>						TOLERANCE FOR METAL		DIVISION	TOLERANCE	-10	±0.06	10-30	±0.11	30-50	±0.13	50-80	±0.15	80-120	±0.18	120-180	±0.20	180-250	±0.25	250-400	±0.30					<table border="1" style="font-size: x-small;"> <tr><th colspan="4">深圳市谷润数字电源有限公司</th></tr> <tr><td>TITLE:</td><td colspan="2"></td><td>MATL:</td></tr> <tr><td>MODEL:</td><td colspan="2"></td><td>WEIGHT:</td></tr> <tr><td>DES</td><td>Jann</td><td>CAD</td><td>UNIT :</td></tr> <tr><td>BY:</td><td></td><td>FILE:</td><td>TEXTURE</td></tr> <tr><td>CHECK</td><td></td><td>FINI</td><td>NO.</td></tr> <tr><td>BY:</td><td></td><td>COLOR:</td><td>SCALE: Fit</td></tr> <tr><td>APP</td><td></td><td>FINSH/</td><td>DATE:</td></tr> <tr><td>BY:</td><td></td><td>TREATMENT:</td><td></td></tr> </table>				深圳市谷润数字电源有限公司				TITLE:			MATL:	MODEL:			WEIGHT:	DES	Jann	CAD	UNIT :	BY:		FILE:	TEXTURE	CHECK		FINI	NO.	BY:		COLOR:	SCALE: Fit	APP		FINSH/	DATE:	BY:		TREATMENT:	
TOLERANCE FOR METAL																																																																					
DIVISION	TOLERANCE																																																																				
-10	±0.06																																																																				
10-30	±0.11																																																																				
30-50	±0.13																																																																				
50-80	±0.15																																																																				
80-120	±0.18																																																																				
120-180	±0.20																																																																				
180-250	±0.25																																																																				
250-400	±0.30																																																																				
深圳市谷润数字电源有限公司																																																																					
TITLE:			MATL:																																																																		
MODEL:			WEIGHT:																																																																		
DES	Jann	CAD	UNIT :																																																																		
BY:		FILE:	TEXTURE																																																																		
CHECK		FINI	NO.																																																																		
BY:		COLOR:	SCALE: Fit																																																																		
APP		FINSH/	DATE:																																																																		
BY:		TREATMENT:																																																																			
<table border="1" style="font-size: x-small;"> <tr><th>PART</th><th>NO.</th></tr> <tr><td>CUSTOMER</td><td></td></tr> <tr><td>TYPE</td><td></td></tr> </table>						PART	NO.	CUSTOMER		TYPE		<table border="1" style="font-size: x-small;"> <tr><th>PART</th><th>NO.</th></tr> <tr><td>CUSTOMER</td><td></td></tr> <tr><td>TYPE</td><td></td></tr> </table>				PART	NO.	CUSTOMER		TYPE		<table border="1" style="font-size: x-small;"> <tr><th>DES</th><th>BY:</th><th>CHECK</th><th>BY:</th><th>APP</th><th>BY:</th></tr> <tr><td>Jann</td><td></td><td></td><td></td><td></td><td></td></tr> </table>				DES	BY:	CHECK	BY:	APP	BY:	Jann						<table border="1" style="font-size: x-small;"> <tr><th>CAD</th><th>UNIT :</th><th>TEXTURE</th><th>SCALE: Fit</th><th>DATE:</th></tr> <tr><td>FILE:</td><td></td><td></td><td></td><td></td></tr> </table>				CAD	UNIT :	TEXTURE	SCALE: Fit	DATE:	FILE:																						
PART	NO.																																																																				
CUSTOMER																																																																					
TYPE																																																																					
PART	NO.																																																																				
CUSTOMER																																																																					
TYPE																																																																					
DES	BY:	CHECK	BY:	APP	BY:																																																																
Jann																																																																					
CAD	UNIT :	TEXTURE	SCALE: Fit	DATE:																																																																	
FILE:																																																																					