



■ Features

- Charger for lithium batteries (Li-ion, LiFePO4 and lithium manganese), Lead-Acid batteries and NiMH
- Built-in 4 stage charging curve (For Lithium batteries) and 3 stage charging curve (For Lead-Acid batteries)
- Universal AC input, wide range cover 90-264V
- Small size
- High efficiency, >90% at AC 90V input
- Protection: Short circuit, OCP, OVP & reverse polarity
- 1 years warranty

■ Applications


- Power tools & Drones
- Electric scooter
- Surveillance system
- Consumer electronic devices

■ Description

GaN085 is a single output 85W AC/DC desktop type charger with 4 and 3 stage charging curve. The different curves are suitable for different batteries, such as Lead-acid batteries (gel, flooded and AGM) and Lithium batteries (Li-ion, LiFePO4 and Lithium manganese).

■ Mode Encoding




GaN085-XXXXYY

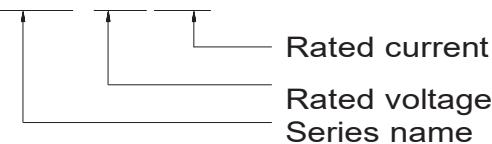




SPECIFICATION(Lead-Acid battery charger)

MODEL		GaN085-148050	GaN085-296028	GaN085-444019	GaN085-592015		
OUTPUT	Charge voltage (High voltage)	14.8V±1%	29.6V±1%	44.4V±1%	59.2V±1%		
	Charge voltage range	10-14.8V	20-29.6V	30-44.4V	40-59.2V		
	Float charge (Low voltage)	13.8V±1%	27.6V±1%	41.4V±1%	55.2V±1%		
	Charge current	5.0A±10%	2.8A±10%	1.9A±10%	1.5A±10%		
	Charge-end current	≤1.0A ±20%	≤0.56A ±20%	≤0.38A ±20%	≤0.3A ±20%		
	Rated power	74W	82.88W	84.36W	88.8W		
	Recommended battery capacity Note.3	20 - 55Ah	12 - 28Ah	10 - 20Ah	8 - 15Ah		
	Leakage current from battery (Typ.)	≤2mA					
CHARGE INDICATOR	LED indication	LED1 on:25% Capacity; LED1 - LED2 on: 50% Capacity; LED1 - LED3 on: 75% Capacity; LED1 - LED4 on: 100% Capacity; LED1 - LED4 flashing : error					
INPUT	Rated input voltage	100 - 240VAC 50 / 60Hz					
	Input voltage range Note.4	90 - 264VAC					
	Power factor (Typ.)	PF>0.55@AC100V, full load					
	Input current (Typ.)	1.7A@100VAC					
	Inrush current (Typ.)	Cold start 75A @230VAC					
	Standby input power	<1W					
PROTECTION	Efficiency (Typ.)	93%	93%	92%	92.5%		
	Short circuit	Yes					
	Over voltage	Yes					
	Reverse polarity	Yes					
ENVIRONMENT	Over temperature	-					
	Working temperature	-10 - +40°C (Refer to "Derating Curve")					
	Working humidity	0 - 90% RH					
	Storage temperature, humidity	-40 - +70°C, 0 - 95% RH					
	Cooling	Natural convection					
SAFETY&MC(Note.6)	Vibration resistance	10 - 50Hz, 2G 10min. 1cycle, 60min. each along X, Y, Z axes					
	Max. temperature rise	< 40°C on casing					
	Hi-Pot Insulation	i/p to o/p: 3000V (1 min)					
	Safety approval	CE/PSE/cETLus/ SAA/CB /FCC/UK					
	EMC Emission	Parameter	Standard	Test Level I Note			
		Conducted	EN55032 FCC PART15	Class B			
		Radiated	EN55032 FCC PART15	Class B			
		Harmonic Current	EN61000-3-2			
		Voltage Flicker	EN61000-3-3			
OTHERS	EMC IMMUNITY	EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11					
	MTBF	30000H					
	Dimension	114*68.4*29mm(L*W*H)					
NOTE	Weight	250g					
	1. Modification for charger specification may be required for different battery specification. Please contact battery vendor and Green digital power for details. 2. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 3. This is Green suggested range. Please consult your battery manufacturer for their suggestions about maximum charging current limitation. 4. Derating may be needed under low input voltages. Please check the derating curve for more details. 5. This protection mechanism is specified for the case the short circuit occurs after the charger is turned on. 6. The battery charger is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. 7. AC Inlet is ICE320-C8, DC cord is 1.5m 2*18AWG wires, DC terminal is defined when order.						

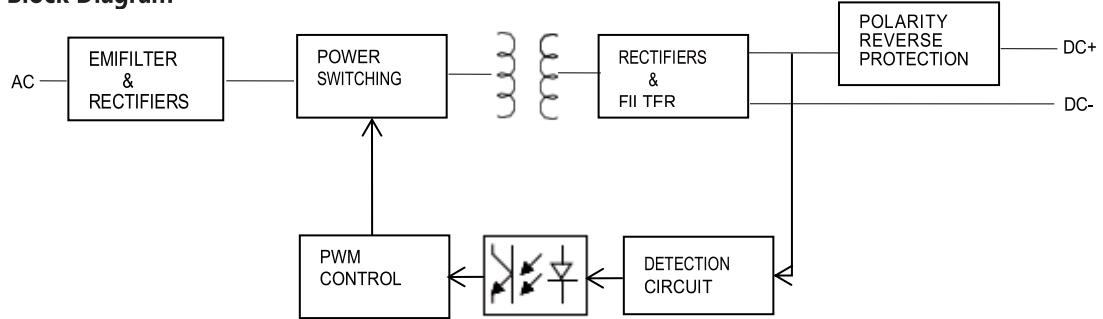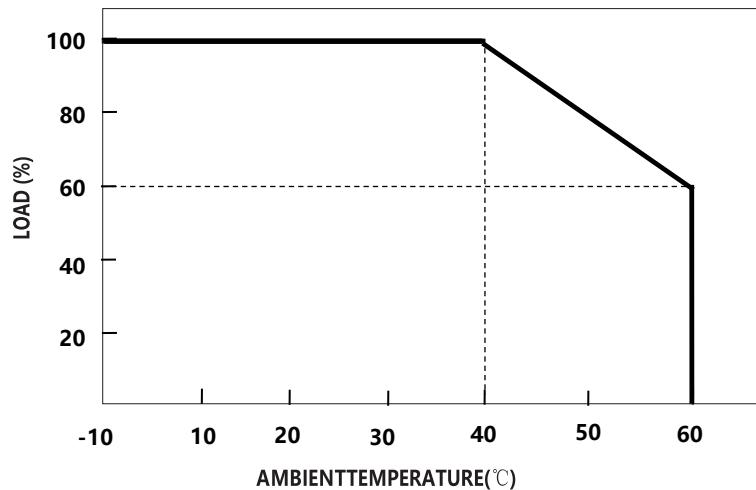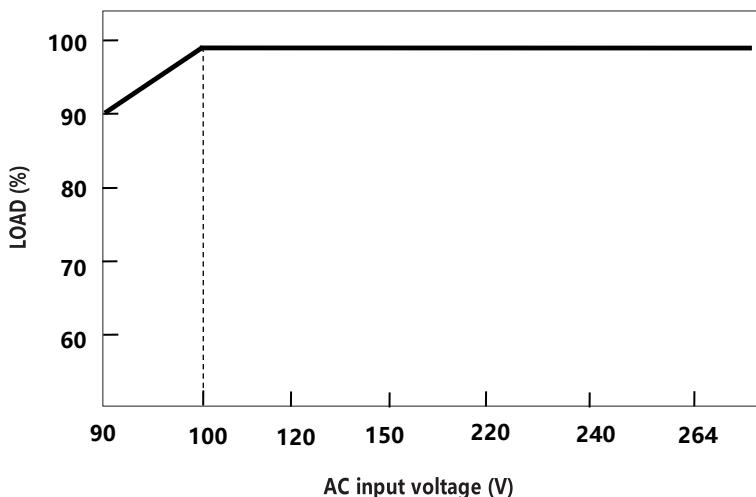
Block Diagram**Derating Curve****Static Characteristics**

■ Charging Curve

◎ 4stage charging curve(Li-ion battery charger)

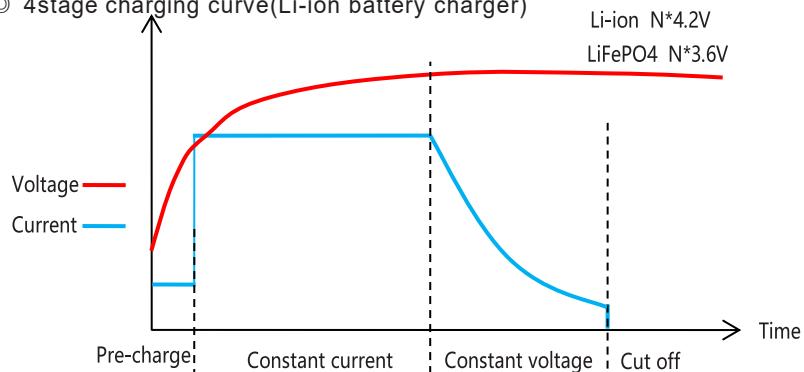

◎ 3stage charging curve(Lead-Acid battery charger)

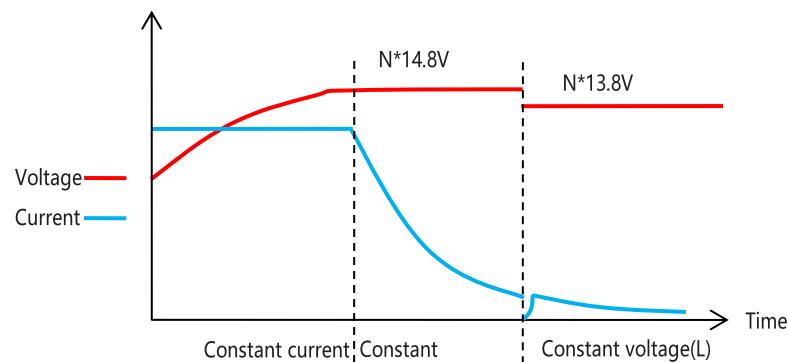

■ Mechanical specification

