

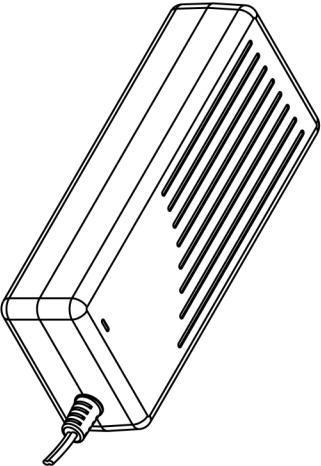
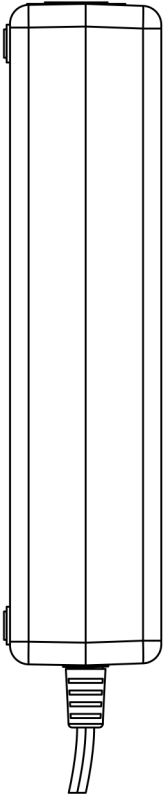
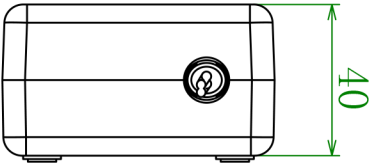


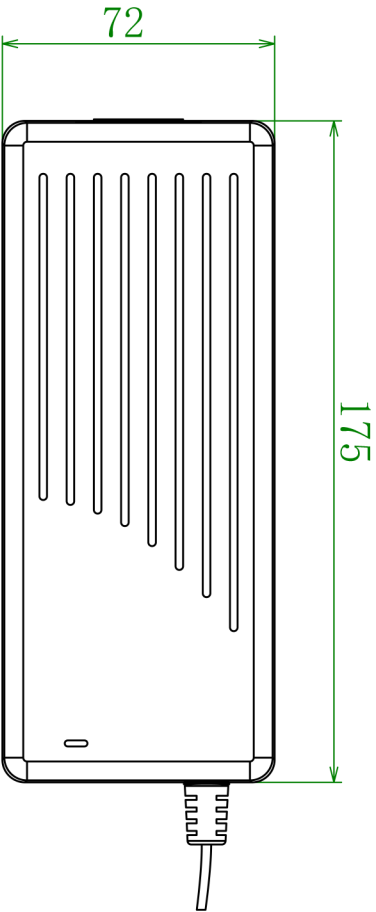

N100-48 (48V 1.5A) 40S NiMH/NiCd Battery Charger		
项目 Item	规格 Specification	备注 Remark
1.输入特性 Input		
额定输入电压 Rating input voltage	100~240Vac 50/60Hz	
输入电压范围 Input voltage range	90~264Vac	
额定输入电流 Rating input current	1.5Arms	Input:100V Output:Full load
最大输入功率 Max input power	100W	Input:100V Output:Full load
2.输出特性 Output		
空载输出电压 No load output voltage	DC 13V	
输出电压范围 Output voltage range	DC 40 ~ 64V	
适用电池 Suit with battery type	40S Ni-MH/Ni-Cd battery	
恒定电流 Charging current	1.5A $\pm 10\%$	
充电涓流 Charging trickle	1/10 CC Pulse	
最大充电电压 Max Charging voltage	DC 64 V	
充电结束条件 Main charge end condition	-DV $\geq 5\text{mV}$ /cell (TYP) or $V_{\text{max}} \geq 1.6\text{V/cell}$ DT/dt $\geq 0.8^\circ\text{C/min}$ or Timer out.	For NiCd, V_{max} is 1.8V/cell
定时器 Timer	8hours (default)	
最大输出功率 Max output power	96 W	
纹波电压 Ripple voltage	$\leq 640\text{mV}$	满载 Full load
充电指示灯 Charging LED	红色Red:Charging	
	绿色Green:Full charge or idle	
输出短路保护 Shorted	有Yes	
输出反接保护 Reversed	有Yes	
效率 Efficiency	$\geq 87\%$	满载 Full load @220V
3.环境要求 Environment		
工作温度 Operate temperature	$-10 \sim +40^\circ\text{C}$	
工作湿度 Operate humidity	$< +90\%$	相对湿度 Relative humidity
存储温度 Storage temperature	$-40 \sim +70^\circ\text{C}$	
存储湿度 Storage humidity	$0 \sim +95\%$	相对湿度 Relative humidity
冷却方式 Cooling	自然冷却 Natural	
抗振动 Vibration resistance	5MM/50HZ/600S	非运行状况 Non-operating condition
抗冲击 Impact resistance	1 meter drop test 3 times	非运行状况 Non-operating condition
4.结构 Mechanical		
重量 Weight	400g	
尺寸 Size	175X72X40MM	外壳尺寸Casing only
接线端子 Connector	按客户要求制定 Refer to order	
5.安全特性 Safety		
最大温升 Max. temperature rise	$< 40^\circ\text{C}$ on casing	
安全认证 Safety approval	CE/cTUVus/CCC	
平均无故障时间 MTBF	30000H	
静电等级 ESD	8.0KV	
隔离耐电压 Hi-Pot Insulation	i/p to o/p: 3000V (1 min)	

TOLERANCE FOR METAL	
A	
DIVISION DIMENSION	TOLERANCE
-10	±0.08
10-30	±0.11
30-50	±0.13
50-80	±0.15
80-120	±0.18
120-180	±0.20
180-250	±0.25
250-400	±0.30

CUSTOMER REV	REV	ZONE	DESCRIPTION	CHA BY/DATE	APP BY/DATE
A					



深圳市谷润数字电源有限公司					
TITLE:			MATE:		
MODEL: 100W-XXXXXX			WEIGHT:		
DES BY:			UNIT : mm		
CHECK BY:			Paper Size:A4		
APP BY:			SCALE: 1:1		
TREATMENT:			DATE:		

PART NO.:	
CUSTOMER P/N:	